



MARINE/RV AGM



0 0 2 2 5

225+ Locations Across North America
To find the location closest to you, please visit
www.continentalbattery.com

Continental
BATTERIES

THE SINGLE SOURCE SOLUTION




Continental Dual Purpose AGM Marine Batteries

Our Premium AGM Marine batteries are designed to withstand the harsh environments that today's Marine and RV electronics and motors are exposed to while also delivering exceptional cycling and starting capabilities. Our next-generation AGM separator and hybrid battery plates provide faster charging, stronger starting power at lower voltages, deeper discharges, reduced sulfation, and longer cycle life compared to other Marine/RV batteries.

Benefits:

- Superior starting & cycling performance
- Spill-proof, maintenance free AGM technology
- 3x Higher cycle life
- 2x Faster charge acceptance
- 20x More vibration resistance
- High strength AGM separator built to withstand vibration
- Leak-proof, double-sealed lid for tilt protection

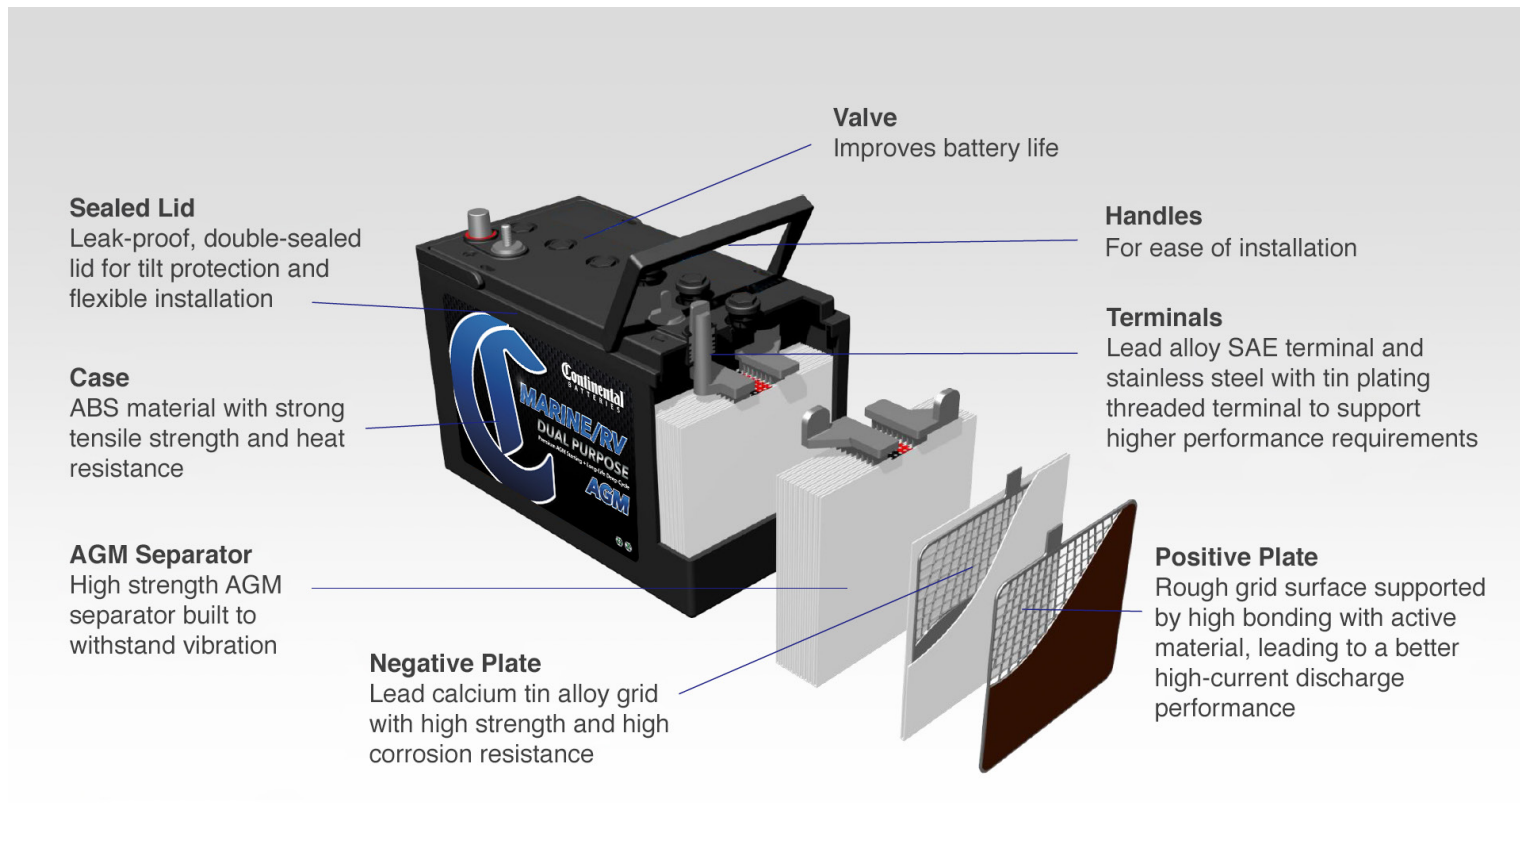

Continental Battery supplies you with the most types of marine batteries to meet every need.

Visit www.continentalbattery.com to see our entire line.

SPECIFICATIONS



M24-DP-AGM

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12V
Nominal Capacity (20HR)	79Ah
Reserve Capacity	150 min
Resistance	≤30 mΩ @ 50% SOC
Cold Cranking Amps	550A

PHYSICAL SPECIFICATIONS

Length	260±2mm (10.24in)
Width	168±2mm (6.61in)
Container Height	208±2mm (8.19in)
Total Height (with terminal)	233±2mm (9.17in)
Weight	Approx. 23.0Kg (50.72lbs)
Case	Black-ABS Material
Cover	Black-ABS Material
Handle	Black-ABS Material



M27-DP-AGM

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12V
Nominal Capacity (20HR)	92Ah
Reserve Capacity	200 min
Resistance	≤30 mΩ @ 50% SOC
Cold Cranking Amps	800A

PHYSICAL SPECIFICATIONS

Length	306±2mm (12.05in)
Width	168±2mm (6.61in)
Container Height	208±2mm (8.19in)
Total Height (with terminal)	231.5±2mm (9.11in)
Weight	Approx. 28.5Kg (59.54lbs)
Case	Black-ABS Material
Cover	Black-ABS Material
Handle	Black-ABS Material



M31-DP-AGM

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12V
Nominal Capacity (20HR)	105Ah
Reserve Capacity	200 min
Resistance	≤30 mΩ @ 50% SOC
Cold Cranking Amps	825A

PHYSICAL SPECIFICATIONS


Length	330±2mm (12.99in)
Width	173±2mm (6.81in)
Container Height	212±2mm (8.35in)
Total Height (with terminal)	235.5±2mm (9.27in)
Weight	Approx. 30.6Kg (67.47lbs)
Case	Black-ABS Material
Cover	Black-ABS Material
Handle	Black-ABS Material

SCHEMATICS




M24-DP-AGM


DIMENSIONS - 260MM (W) X 168MM (L) X 233MM (H)

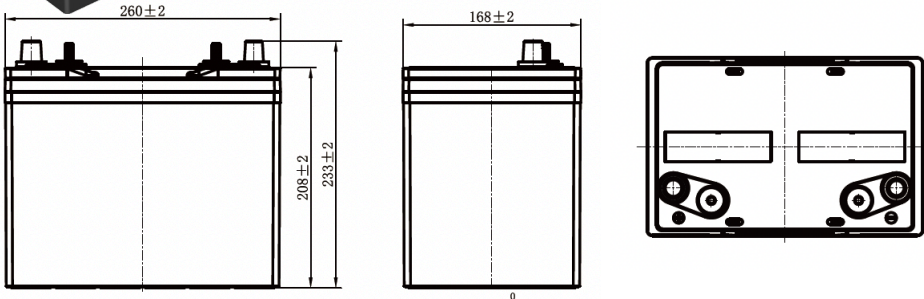

STANDARD TERMINAL

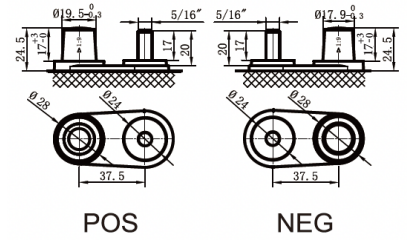


CELL LAYOUT




M27-DP-AGM

DIMENSIONS - 306MM (W) X 168MM (L) X 231.5MM (H)

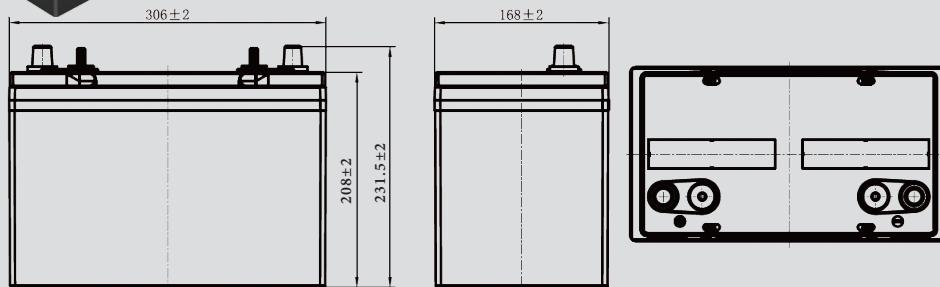

STANDARD TERMINAL

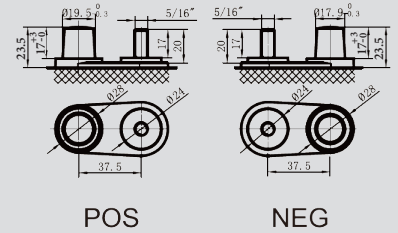


CELL LAYOUT




M31-DP-AGM


DIMENSIONS - 330MM (W) X 173MM (L) X 237MM (H)

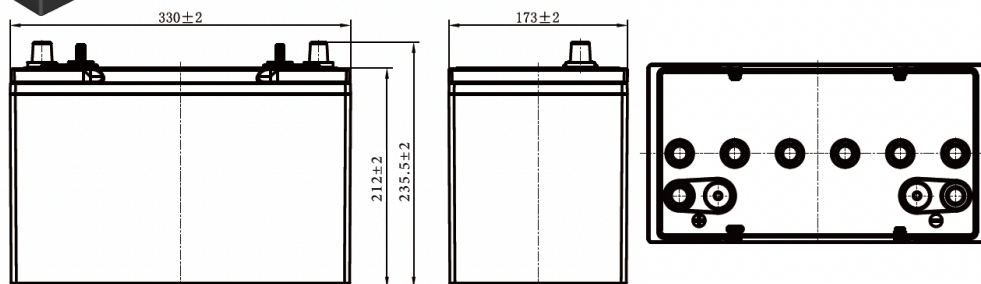

STANDARD TERMINAL

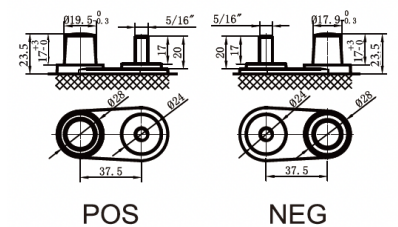


CELL LAYOUT




CHARACTERISTICS




SELF-CHARGE CHARACTERISTICS

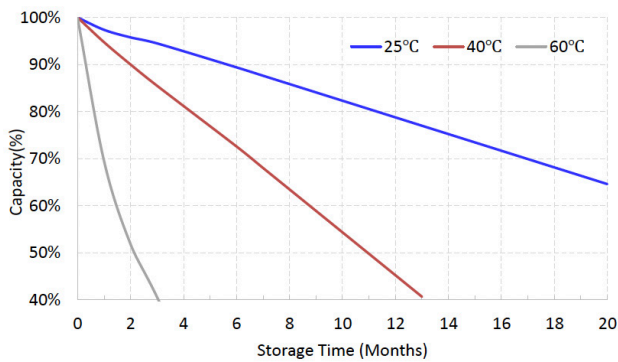

CHARGING PROFILE (25°C, 77°F)

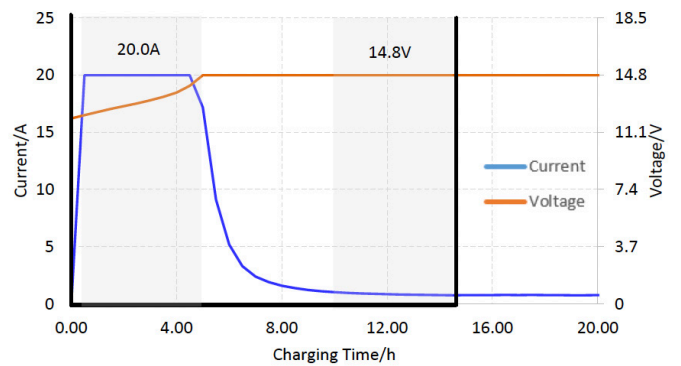

CYCLE LIFE VS. DEPTH OF DISCHARGE (DOD)

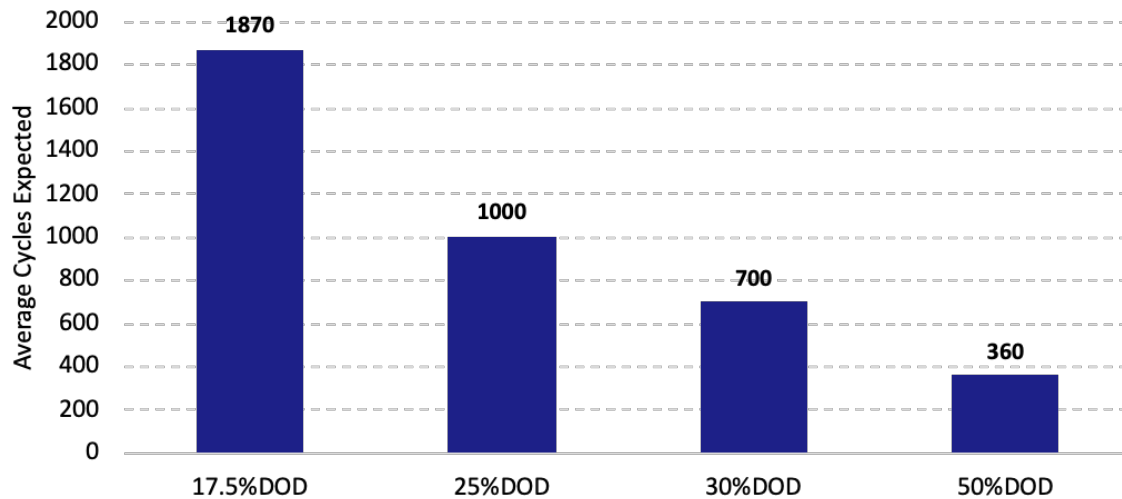

LEADING THE CHARGE

Continental
BATTERY SYSTEMS

www.gocbs.com

The Continental Battery Systems warranty policy requires a receipt from the original purchaser. The date of this receipt establishes the beginning date of service used for the Continental Battery Systems warranty, which offers a one-year (12 months) free replacement and 30-day undamaged return policy for all MARINE AGM-Continental branded batteries. We do not offer a lifetime warranty. If the Continental battery is replaced under the warranty policy, your replacement battery carries a warranty period from the original Continental battery purchase date. For technical or warranty support, please call Continental Battery Systems customer service at 1-844-935-1186 or visit www.gocbs.com to find our closest location.